


## PHYSICAL SPECIFICATION


Nominal Voltage		12V
Nominal Capacity(20HR)		3.3AH
Dimension	Length	134±1mm (5.28inches)
	Width	67±1mm (2.64 inches)
	Container Height	60±2mm (2.36 inches)
	Total Height	66±2mm (2.60 inches)
Weight		Approx 1.30Kg (2.86 lbs)
Standard Terminal		F1-Fasten Tab No.187E



Dimensions (mm)

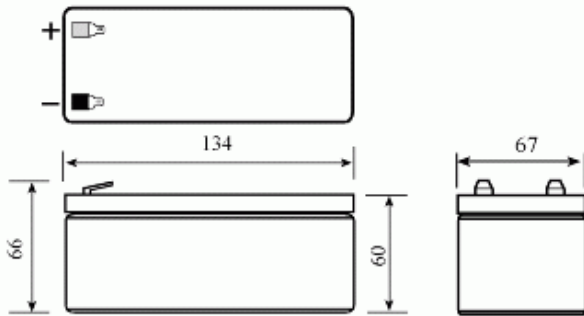


Standard Terminal  
F1 (Fasten Tab No.187E)

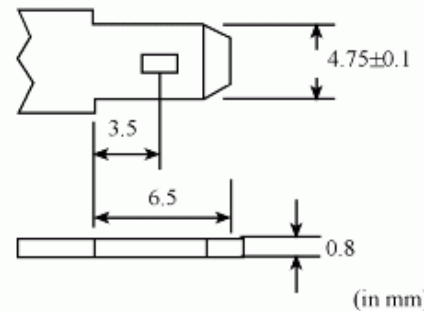


## ELECTRICAL SPECIFICATION

Capacity	20 hour rate(0.165A)	3.3Ah	It is recommended to use constant-voltage charge and recharge immediately after use
	10 hour rate(0.33A)	3.14Ah	
	5 hour rate(0.53A)	2.81Ah	
	1 hour rate(1.98A)	1.98Ah	
Capacity affected by temperature	40°C (104°F)	105%	Constant-Voltage Charge
	20°C (68°F)	100%	
	0°C (32°F)	85%	Initial Charging Current less than 0.99A Voltage 14.4-15V at 20°C (68°F) Temperature Coefficient -30mV/°C
Internal Resistance	Fully charged battery(20°C, 68°F)50mΩ		Standby

Discharge Characteristics fully charged (20°C/68°F)

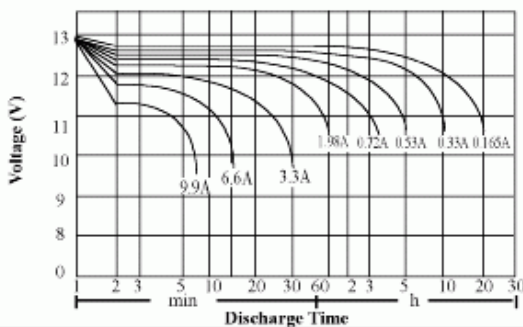

Discharge Characteristics (0°C/32°F, 40°C/104°F)

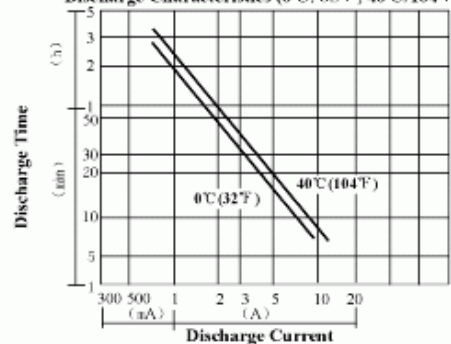

**U.S.A.**  
Power Battery Company, Inc.  
25 McLean Blvd.  
Paterson, N.J. 07514-1507  
Phone: (973) 523-8630  
Fax: (973) 523-3023  
E-mail: sales@powbat.com  
Web page: www.powerbattery.com

**CANADA**  
Power Batteries Ltd.  
770 Thomas Ave.  
Iberville, Québec, J2X 5E7  
Phone: (450) 346-3273  
Fax: (450) 346-8003  
E-mail: powerbat@sympatico.ca  
Web page: www.powerbattery.com

**UK**  
Power Batteries Ltd.  
Premier Way Abbey Park Industrial Estate  
Romsey Hampshire, SO51 9AQ  
Phone: +44 (0)1794 835900  
Fax: +44 (0)1794 835910  
E-mail: sales@powbat.co.uk  
Web page: www.powbat.co.uk

**ITALY**  
Power Battery Srl  
Via Locatelli 105  
20046 Biassono MI - ITALY  
Phone: +39 039 2324571  
Fax: +39 039 349 249200  
E-mail: calberti@powbat.it  
Web page: www.powbat.it